




aFX[®] Series Dock Leveler

Product Specifications

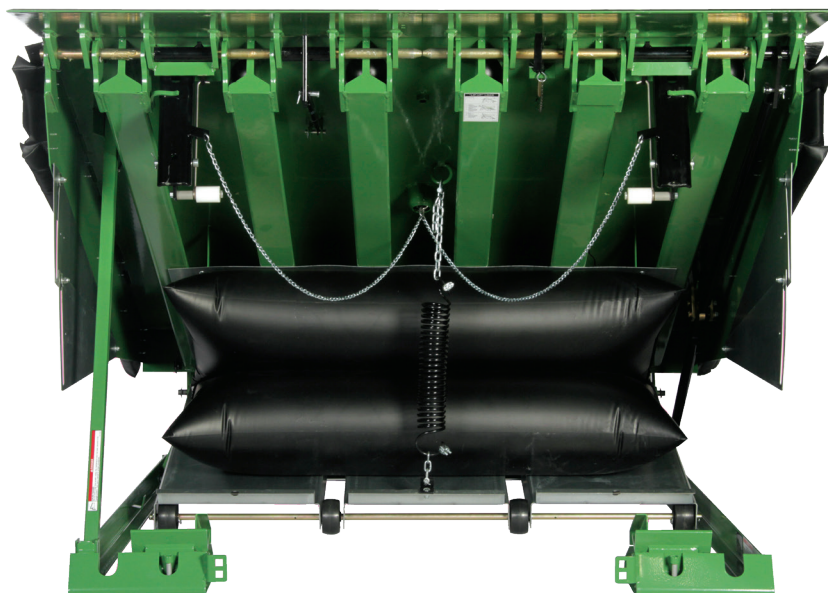

DESIGN HIGHLIGHTS

- Patented SafeTFrame[™] design
- Patented airDefense[®] stump-out & freefall protection system with 60,000 lbs. (27,215 kg) structural dock level support legs
- Lug style lip hinge & Lambda[™] beam structure
- EZ-Clean[™] pit kit
- High volume, low pressure lifting system
- Low maintenance design
- Exclusive GRAVITY LIP[™]
- Automatic lip extension
- Lifetime lip hinge warranty
- NEMA 4X non-metallic push-button control panel (non-interlock capable)
- 120V single phase operation
- Full operating range toe guards
- Below-dock endloading capability
- 16" lip standard (406 mm)
- Fixed rear hinge - no pinch points
- Integral maintenance strut & lip support latch
- Heavy-duty B410-14F dock bumpers
- Reduced lip crown/extended lip chamfer

AVAILABLE OPTIONS

- | | |
|---|--|
| ☐ Brush weatherseal | ☐ Special paint color |
| ☐ Spacer kit for existing & sloped pits | ☐ Abrasive surface |
| ☐ ENERGY GUARD [®] perimeter weatherseal system | ☐ Lip taper _____ (specify) |
| ☐ 18" lip (457 mm) ☐ 20" lip (508 mm) | ☐ High lip crown |
| ☐ 24" pit conversion (610 mm) | ☐ Pan option: For installation without pre-formed concrete pits, dock leveler supplied with integral pre-formed steel pan for pour-in-place construction. Dock leveler shall be in an enclosed steel pan structure complete with its own six-piece welded structural curb angles and concrete anchors. The dock leveler is to be concreted in place as the floor is poured. |
| ☐ 240V single phase (Int'l orders only) | ☐ Other _____ |
| ☐ Non-metallic control panel (interlock capable) | |
| ☐ Spray foam insulated deck | |
| ☐ Spray metalize (deck, lip & subframe only) | |

AVAILABLE ACCESSORIES

- ☐ STAR[®] vehicle restraint _____
- ☐ HIDDEN HOOK[™] recessed restraint
- ☐ MANUAL SURFACE CHOCK wheel restraint
- ☐ SURFACE-CHOCK[™] wheel restraint
- ☐ AUTO CHOCK[®] wheel restraint
- ☐ VERSACHOCK wheel restraint
- ☐ TALON[®] wheel restraint
- ☐ Digital master or combination control panel with HMI _____

BUMPER OPTIONS

- | | | |
|---|------------------------------------|--------------------------------------|
| ☐ B410-14 | ☐ VB420-11F | ☐ B610-14 |
| ☐ VB420-11 steel faced | ☐ B610-14F | ☐ Other _____ |

CAPACITY

- | | | |
|---|---|---|
| ☐ 30K lb (13.6 Kg) | ☐ 35K lb (15.8 Kg) | ☐ 40K lb (18 Kg) |
| ☐ 45K lb (20.4 Kg) | ☐ 50K lb (22.7 Kg) | |

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

MODEL _____ QUANTITY _____

VOLTAGE/PHASE _____

CERTIFIED FOR CONSTRUCTION

BY _____ DATE _____

COMPANY _____

ADDRESS _____

800.558.6960

1. **General:** Kelley's "aFX" airForce Technology dock leveler with airDefense® system to be complete package, including motor housing assembly, full operating range toe guards, integral support struts for deck and lip lock. Units available in 30,000 - 50,000 lbs. (13,607 - 22,679 kg) capacities. Unit conforms to ANSI MH14.1-1987 performance requirements. Unit to be manufactured by Kelley.
2. **Construction, Platform Assembly:** Platform to be constructed of unitized, welded high tensile steel safety tread deck plate. High quality products are manufactured in a Certified Welding Fabricator (CWF) facility. Exclusive Lambda deck beams optimize twist resistance and stress distribution. Deck to be ¼" (6 mm) thick on 30K-35K lb. (13.6K-15.8K kg), and ⅝" (8 mm) thick on 40K-50K lb. (18K-22.7K kg) capacities.
3. **Lip Assembly:** Lip to be ⅝" (16 mm) thick on 30K-35K lb. (13.6K-15.8K kg) capacities, and 1⅞" (17 mm) on 40K-50K lb. (18K-22.7K kg) capacities. Self cleaning lug-style lip hinge comes standard with heavy lugs welded directly to each beam and lip assembly. Comes standard with a rated lifetime lip hinge warranty. All units to be 16" (406 mm) high tensile steel safety tread lip plate with chamfered leading edge. Lip rod to be a minimum of 1" (25 mm) solid steel on all capacities.
4. **Lip Extension:** GRAVITY LIP™ Automatic Lip Extension ensures proper lip extension with descent of dock leveler into trailer.
5. **Rear Subframe & Hinge:** Rear structural frame consists of a welded structure constructed from 4 structural angle vertical members connecting two horizontal members. The upper rear angle has longitudinal support gussets & additional deck supports to promote structural stiffness. The hinge system consists of four ¾" (19 mm) thick lugs allowing 4 inches (100 mm) of side to side deck twist.
6. **SafeTFrame™:** Adjustable front and rear leveling system eliminates the need for installer to place and weld steel shim stock under the vertical uprights. System provides more consistent installation and prevents a gap or "bump" between the rear transition angle and curb angle. The rear SafeTFrame system consists of four heavy-duty vertical uprights at the rear of the leveler, each with an adjustable 3"x3" (76mm x 76mm) pad that sits on the pit floor. Front SafeTFrame system includes an adjustment point on each front support pedestal accessed through the open lip hinge area. Both front pedestals and rear supports can be micro-adjusted independently through a 1 ½" (38 mm) range using a ½" (12.5 mm) socket, compensating for even the worst pit conditions.
7. **Power Unit:** Power unit is an electric motor and blower.
8. **Electrical:** Fan motor is 120V single phase. Air bag and fan motor assembly are mounted to galvanized pan subassembly. 240V single phase is available, consult factory.
9. **Pit Cleaning System:** All Kelley dock levelers are built with an open frame design to provide easy access to the pit floor for routine cleaning and scheduled maintenance. The standard EZ-Clean™ Pit Kit eliminates the need for any additional tools for complete access to the concrete floor or access to the fan motor.
10. **Control Panel:** (Non-Interlock Capable), non-metallic, single push-button control panel. (Optional Interlock capable box available).
11. **Product Finish:** Green finish.
12. **Safety Legs:** airDefense sensor rollers ride along reinforced cams, providing fluid free float motion to eliminate stump-out while also providing a measure of freefall protection in the event of premature trailer separation. High-efficiency 60,000 lbs. (27,225 kg) structural dock level support legs. Drop-tested to the full rated capacity of the dock leveler.
13. **Below-dock Control (Endloading):** Kelley's airDefense system allows for lowering of leveler without extending lip.
14. **Toe Guard Protection:** Full operating range toe guards with two galvanized sliding guards (yellow OSHA required markings per ANSI/Z535.1) provided on the sides of the dock leveler.
15. **Integral Support Strut:** Integral support strut keeps ramp raised during routine maintenance and pit cleaning.
16. **Integral Lip Lock:** Lip lock keeps lip raised for routine maintenance and cleaning.
17. **Float Compensation:** Allows for vertical carrier deflection when lip is in contact with truck bed.
18. **Operation:** Kelley's "aFX" Dock leveler rises when push-button is pushed and held. GRAVITY LIP™ automatically extends as deck section descends into trailer bed. After loading or unloading is complete dock attendant pushes button to activate air system and raise dock leveler. GRAVITY LIP™ moves pendant and dock leveler is stored. In stored position, dock leveler is fully supported by dock level support legs. Ramp may be lowered to fully supported below dock level position without extending lip, to service low trucks in end load situations.
19. **Installation:** Unit shipped completely assembled and ready for installation in pre-formed concrete pit. Pit depth is 20" (508 mm) for 6' (1.83 m) and 8' (2.44 m) long units and 24" (610 mm) for 10' (3.05 m) long units. Pit construction to be in accordance with certified Kelley pit detail drawings. Contact Kelley for current cost and nearest distributor.
20. **Limited Warranty:** Limited lifetime (rated) lip hinge warranty. Limited 5-year parts & labor warranty on lifting system (bag, motor, hoses, gaskets, fittings, & seals). Limited 1-year parts and labor warranty on remaining components. Limited 10-year structural warranty available upon engineering approval of written application.
21. **Bumpers:** Unit to include two heavy-duty dock bumpers model B410-14F (4" Thick (100 mm) x 14" W (356 mm) x 10" H (254 mm)).

NOMINAL DIMENSIONS		
MODEL	LEVELER WIDTH	LEVELER LENGTH
aFX6X6	6' (1.83 m)	6' (1.83 m)
	6'6" (2.01 m)	6' (1.83 m)
aFX7X6	7' (2.13 m)	6' (1.83 m)
aFX6X8	6' (1.83 m)	8' (2.44 m)
aFX6.5X8	6'6" (2.01 m)	8' (2.44 m)
aFX7X8	7' (2.13 m)	8' (2.44 m)
aFX6X10	6' (1.83 m)	10' (3.05 m)
aFX6.5X10	6'6" (2.01 m)	10' (3.05 m)
aFX7X10	7' (2.13 m)	10' (3.05 m)



Kelley
 1612 Hutton Drive, Suite 140
 Carrollton, TX 75006
 800.558.6960
www.kelleydocksolutions.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Kelley as word and logo are registered trademarks belonging to ASSA ABLOY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLOY. All rights reserved. Part of ASSA ABLOY. Printed in USA. KPS-DAFX-0725