



# DGB Series Safety Gate

## Product Specifications



### DESIGN HIGHLIGHTS

- Manual or Powered Operation
- Protection for 8', 9' and 10' Wide Door Openings
- Capable of Stopping 15,000 lbs. Load at 4 MPH
- 30" High Barrier
- PLC Programmable Controller (DGB-P only)
- Steel NEMA 12 Push-button Control Panel (Interlock Capable) (DGB-P only)
- Electrical reversing Edge on Barrier Arm (DGB-P only)
- Red/Green LED Interior & Exterior Light Communication System (DGB-P only)
- Left or right Side Operation
- Painted Safety yellow
- Independent of Dock Leveler

### ACCESSORIES

- ☐ Master Control Panel with HMI
- ☐ Others \_\_\_\_\_

### APPLICATION

- ☐ 8' Wide Door (Standard) 102" opening clearance (Minimum 12' ceiling required)
- ☐ Optional 9' Wide Door 114" opening clearance (Minimum 13' ceiling required)
- ☐ Optional 10' Wide Door 126" opening clearance (Minimum 14' ceiling required)

### PROJECT INFORMATION

JOB NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

GENERAL CONTRACTOR \_\_\_\_\_

DISTRIBUTOR \_\_\_\_\_

MODEL ☐ DGB-M (Manual Models) ☐ DGB-P (Powered Models)

QUANTITY \_\_\_\_\_

### CERTIFIED FOR CONSTRUCTION

BY \_\_\_\_\_

COMPANY \_\_\_\_\_

ADDRESS \_\_\_\_\_

DATE \_\_\_\_\_

### DGB-M AVAILABLE OPTIONS


- ☐ Fully raised Limit Switch (required for interlocking with other equipment)
- ☐ Others \_\_\_\_\_

### DGB-P AVAILABLE OPTIONS


- ☐ Key Switch Operations
- ☐ Audible Alarm
- ☐ Others \_\_\_\_\_

- 1. **General:** DGB series structural steel safety gate is capable of stopping a 15,000 lbs. load traveling at 4 mph. Standard model compatible with an 8' wide door opening, and requires a minimum 12' ceiling height free from obstructions. Optional models available for 9' wide door opening (13' clear ceiling height) and for 10' wide door opening (14' clear ceiling height). Unit to be manufactured by Kelley.
- 2. **Construction:** Base Assembly constructed of high tensile steel tubing and structural steel plate.
- 3. **Arm Assembly:** Arm constructed of high tensile steel tubing.
- 4. **Counterbalance Assembly:** Arm counterbalanced by a high tensile steel spring.
- 5. **Power Unit:** On DGB-P powered unit, the arm is rotated by an electro-mechanical linear actuator.
- 6. **Reversing Edge:** On DGB-P powered unit, the arm is protected by an automatic electrically operated, reversing edge.
- 7. **Control Panel:** [DGB-P Only] Steel Interlock capable control box (14"W x 16"H) with programmable logic controller (PLC) and "real time" diagnostic capability, industrial quality push buttons, integral interior & exterior LED light communication system and printed operational instructions.
- 8. **Electrical:** [DGB-P Only] Gate and exterior lights operate on 24 volt circuit. Control panel requires 120 volt, single phase, 60 HZ supply. All components are UL listed.
- 9. **Product Finish:** Primed followed by safety yellow paint finish.
- 10. **DGB-M Operation:** Operator lifts up counterbalanced arm to the fully raised position freeing the dock area for loading and unloading operations. When those operations are complete, operator lowers the arm until it is fully seated in the saddle located on the base assembly.
- 11. **DGB-P Operation:** With the gate down, the red LED light on the interior control panel will be illuminated and the exterior LED light will be flashing green. The operator presses the RAISE button. The gate arm will rotate from its stored position to a vertical position. The green LED light on the interior control panel will illuminate while the exterior LED light will change from flashing green to red. Loading and unloading operations may now be performed. After these operations are complete, the operator presses the LOWER button. The gate will rotate from its vertical position to a horizontal stored/blocking position. The red LED light on the interior control panel will illuminate while the exterior LED light will change from flashing red to green, indicating to the truck driver it is safe to pull away from the dock.
- 12. **Installation:** requires mounting of the bases, control panel, LED lights and caution signs in strict accordance with Kelley installation instructions. Gate and lights must be wired to control panel. Gate and control panel to be electrically installed by others. Installation is recommended to be performed only by authorized Kelley Distributors. Installation is not included unless specifically contracted for with Kelley Distributor.
- 13. **Limited Warranty:** Kelley warrants all components to be free of defects in material and workmanship, under normal use, for a limited 1-year base period from date of shipment in accordance with Kelley Standard Warranty Policy. The "Base Warranty Period" will begin on the completion of installation or the sixtieth (60th) day after shipment

| MODEL | ACTIVATION | STANDARD FEATURES  |
|-------|------------|--|
| DGB-M | Manual     | Counter-balanced steel arm with steel supports, Dampened arm return  |
| DGB-P | Powered    | Selector switch operation (raise/Auto/Lower), PLC programmable controller, Steel NEMA 12 Push-button Control Panel (Interlock Capable), red/Green LED interior & exterior light communication system, Electric reversing edge on barrier arm |

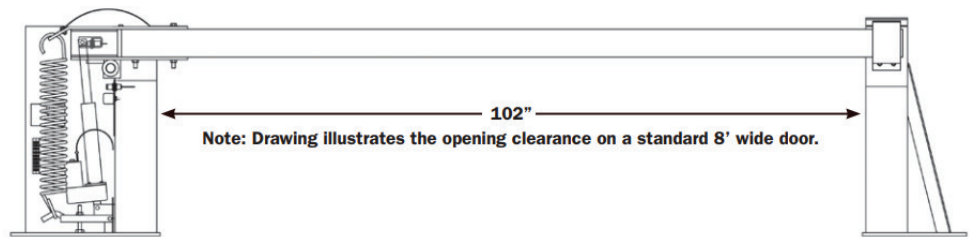

Exterior Lights

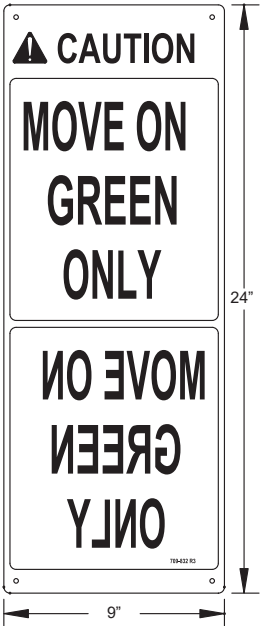

Kelley  
1612 Hutton Drive, Suite 140  
Carrollton, TX 75006  
800.558.6960  
[www.kelleydocksolutions.com](http://www.kelleydocksolutions.com)

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Kelley as word and logo are registered trademarks belonging to ASSA ABLOY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.