

DSH Foam Dock Seal with Head Curtain

Product Specifications




DESIGN HIGHLIGHTS

- Top of hood is tapered forward and securely fastened to the building wall
- Tapered top is supported with thick wall steel pipe
- Fiberglass stays add stiffness to hood top to prevent sagging
- Hood curtain splits offer load relief and higher clearance
- Roll-formed galvanized steel framing reduces pressure on building wall, warrated for 5 years
- Endurance tested foam core is continuously bonded to frame surface with flexible, non-flammable adhesive
- A wide selection of durable coated fabrics provide maximum durability
- Highly resilient, open-celled polyurethane foam keeps original shape and compresses easily to extend seal life
- Side pad bottoms are tapered to avoid pinching and wear
- All pads are vented for air and moisture release
- Full length yellow stripes guide drivers to the dock
- Heavy-duty, galvanized steel mounting brackets included

APPLICATION DATA	
Door width: ftin.	
Door height:ftin.	
Dock height:ftin.	
Bumper protection*:in. (*Includes bumper projection and any building wall/foundation offset or cantileve	r)

TRUCKS AND TRAILERS SERVICED	
, ,	Rear step section: ☐ Yes ☐ No Yard jockeys: ☐ Yes ☐ No
PROJECT INFORMATION	
JOB NAME ADDRESS GENERAL CONTRACTOR DISTRIBUTOR QUANTITY	
CERTIFIED FOR CONSTRUCTION	
BY COMPANY ADDRESS DATE	

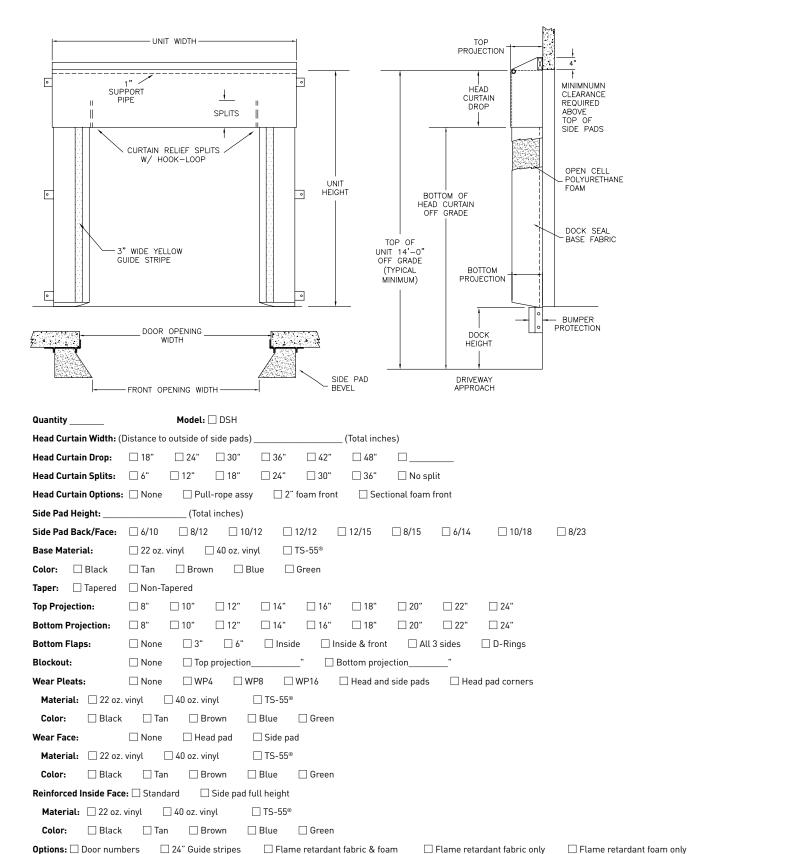

^{*}Note: Consult factory for blockout application assistance.

Side Pad Mounting Brackets:

None

☐ Flats & angles

☐ Angles



☐ 1 ½" Offsets & angles

Kelley

1612 Hutton Drive, Suite 140 Carrollton, TX 75006 800.558.6960 www.kelleydocksolutions.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Kelley as word and logo are registered trademarks belonging to ASSA ABLOY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

^{*}Conversions: To convert measurements to metric, see formulas below: Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm) Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)