



V-Seal Head Pad Dock Seal

Product Specifications



DESIGN HIGHLIGHTS

- V-shaped side pads provide better trailer access and seal hinge gaps on trailer swing-out doors
- Fixed-foam head pad seals gap between top of trailer and building wall
- 22 oz. vinyl-base fabric with protective pleated layer of TS-55® super fabric in critical wear areas provides exceptional wear resistance
- Full-length yellow stripes guide drivers to the dock
- Roll-formed galvanized steel framing reduces pressure on building wall
- 3-inch inside bottom flaps provide extra protection against outside elements

APPLICATION DATA

Door width: _____ ft. _____ in.

Door height: _____ ft. _____ in.

Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: ☐ Yes ☐ No

Tailgate/step section size: _____ in

Rear step section: ☐ Yes ☐ No

Yard jockeys: ☐ Yes ☐ No

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

QUANTITY _____

CERTIFIED FOR CONSTRUCTION


BY _____

COMPANY _____


ADDRESS _____



DATE _____

Dock Empty - Side Pad in
Ready to Use Position



Truck Spotted - Side Pads Seal the
Gap Between Swing Door and
Trailer Wall



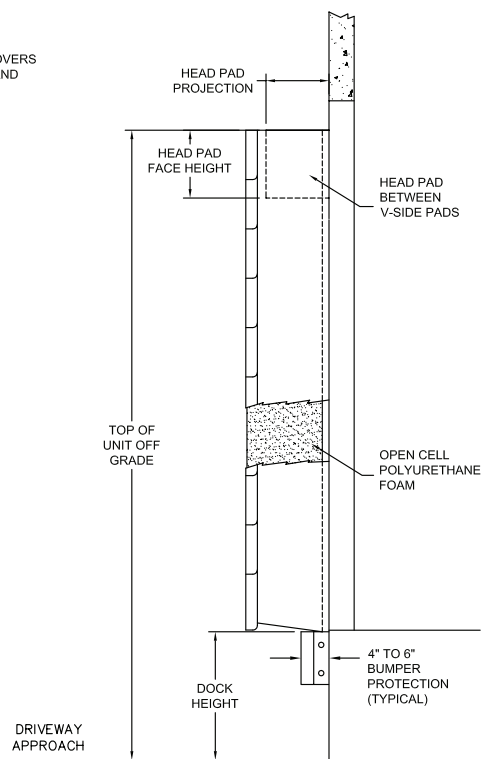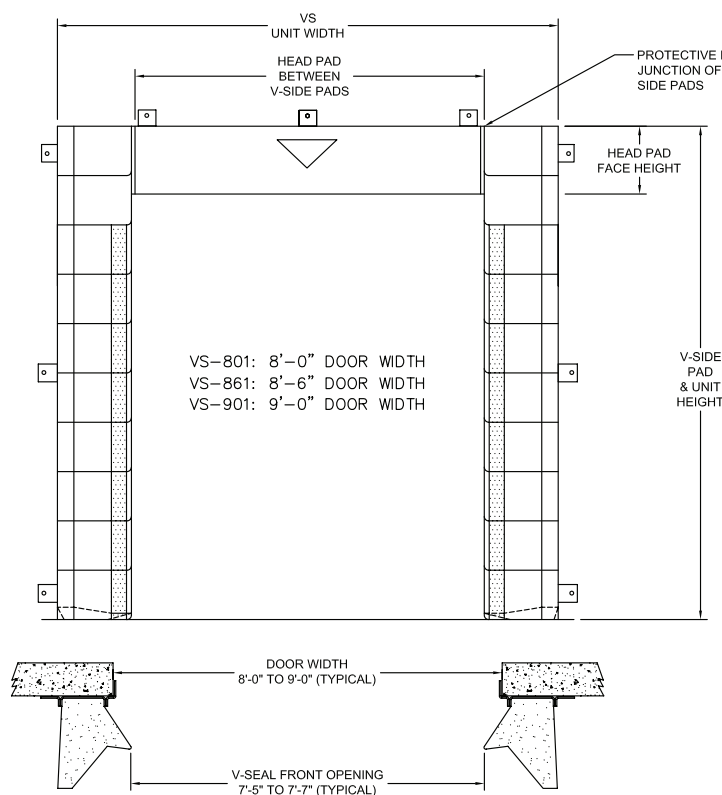

Quantity _____ **Model:** ☐ VS-801 (for 8'-0" wide doors) ☐ VS-861 (for 8'-6" wide doors) ☐ VS-902 (for 9'-0" wide doors)

Unit Width: ☐ 114" (VS-801) ☐ 120" (VS-861) ☐ 123" (VS-902)

Head Pad Back/Face: ☐ 12/12 ☐ 18/18 ☐ 12/18 ☐ WearMaster® head pad

Drop Curtain: ☐ None ☐ 12" ☐ 18" ☐ 24" ☐ Hook-Loop

Unit Height: _____ " = (Door height + Head pad back height - Typical)

Base Material: 22 oz. vinyl base fabric with TS-55® wear pleats in critical wear areas

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Wood Blockout: ☐ None ☐ Tapered ☐ Non-Tapered

Blockout Top Projection: ☐ 0" ☐ 2" ☐ 4" ☐ 6" ☐ 8" ☐ 10" ☐ 12" ☐ _____"

Blockout Bottom Projection: ☐ 0" ☐ 2" ☐ 4" ☐ 6" ☐ 8" ☐ 10" ☐ 12" ☐ _____"

Foam Blockout: ☐ None ☐ Tapered ☐ Non-Tapered

Blockout Top Projection: ☐ 0" ☐ 2" ☐ 4" **Blockout Bottom Projection:** ☐ 0" ☐ 2" ☐ 4"

Head Pad Wear Face: ☐ None ☐ Yes

☐ 22 oz. vinyl ☐ 40 oz. vinyl ☐ 40 oz. CSM ☐ TS-55®

☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Bottom Flaps (3" Inside Flaps are Standard): ☐ 6" Inside ☐ _____" (Up to 12")

Options: ☐ Door numbers ☐ Flame retardant fabric & foam ☐ Flame retardant fabric only ☐ Flame retardant foam only

Side Pad Mounting Brackets: ☐ Flats & angles (VS-902) ☐ Angles ☐ 1 1/2" Offsets & angles (VS-801 & VS-861)

*Note: Consult factory for blockout application assistance.

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



Kelley
1612 Hutton Drive, Suite 140
Carrollton, TX 75006
800.558.6960
www.kelleydocksolutions.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Kelley as word and logo are registered trademarks belonging to ASSA ABLÖY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLÖY. All rights reserved. Part of ASSA ABLÖY. Printed in USA. KPS-SEVS-1220