



FLEXFRAME® Dock Shelter

Product Specifications



*Shown with optional head frame.

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: ☐ Yes ☐ No

Rear step section: ☐ Yes ☐ No

Tailgate/step section size: _____ in

Yard jockeys: ☐ Yes ☐ No

DESIGN HIGHLIGHTS

- Side frames covered with white 18 oz. coated vinyl to transmit natural light into the loading area
- Overlapping layers of fabric provide more wear resistance against the sharp corners of the trailer, extending the life of the shelter
- Raked header permits weather drainage (flat header is used when shelter is protected by a hood or canopy)
- Roll-formed galvanized steel framing
- Fiberglass stays add stiffness to shelter face curtains
- Unit is impactable and can cater to off-center trailers

APPLICATION DATA

Door width: _____ ft. _____ in.

Door height: _____ ft. _____ in.

Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

CERTIFIED FOR CONSTRUCTION

BY _____

COMPANY _____

ADDRESS _____

DATE _____

PROJECT INFORMATION



JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

QUANTITY _____

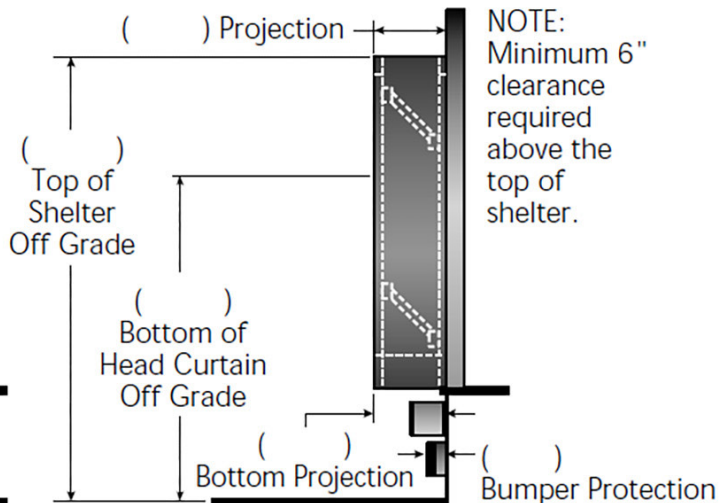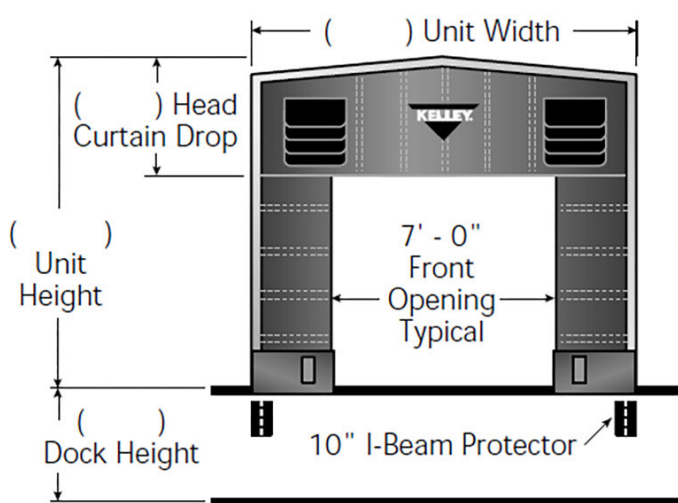

Drive/Approach: ☐ Level ☐ Incline ☐ Decline _____ % grade

Frame: Standard galvanized steel

Building Wall Construction: ☐ Metal ☐ Other

Unit Width: ☐ 11'6" ☐ 12'0"

Unit Height: ☐ 11'0" ☐ 11'6" ☐ 12'0" ☐ 12'6"

Head Member Style: ☐ Raked ☐ Flat ☐ 45° Sloped

Base Material: ☐ TS-55® ☐ 40 oz. vinyl ☐ 22 oz. vinyl

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Head Curtain Drop: ☐ 30" ☐ 36" ☐ 42" ☐ 48" ☐ 54" ☐ _____"

Taper: ☐ **Yes: Projection Options:** ☐ 18" Top/24" Bottom ☐ 24" Top/30" Bottom ☐ 24" Top/18" Bottom ☐ 30" Top/24" Bottom

☐ **No: Projection Choice:** ☐ 18" ☐ 24" ☐ 30" ☐ 36"

Options: ☐ None ☐ Door numbers ☐ Full length guide stripes ☐ Pull rope assembly

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



Kelley
1612 Hutton Drive, Suite 140
Carrollton, TX 75006
800.558.6960
www.kelleydocksolutions.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Kelley as word and logo are registered trademarks belonging to ASSA ABLÖY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLÖY. All rights reserved. Part of ASSA ABLÖY. Printed in USA. KPS-SHFF-0925