



AQUASHIELD® Rain Sealing System

Product Specifications



DESIGN HIGHLIGHTS

- Protects dock from moisture infiltration, keeping products safe from costly water damage
- Automatic position, no manual activation necessary
- Heavy-duty galvanized steel channel head frame
- Translucent fiberglass raked head frame for fast water drainage
- High-resilient foam core protected by three layers of durable coated fabric
- Seal is easily replaceable, reducing down time and maintenance costs
- Rugged support brackets for mounting over existing equipment
- Weighted side covers provide extra protection for the dock area (not shown)
- Covers trucks 12'-9" to 13'-6" high

APPLICATION DATA

Door width: _____ ft. _____ in.

Door height: _____ ft. _____ in.

Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: ☐ Yes ☐ No

Rear step section: ☐ Yes ☐ No

Tailgate/step section size: _____ in

Yard jockeys: ☐ Yes ☐ No

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

QUANTITY _____


CERTIFIED FOR CONSTRUCTION

BY _____

COMPANY _____

ADDRESS _____

DATE _____

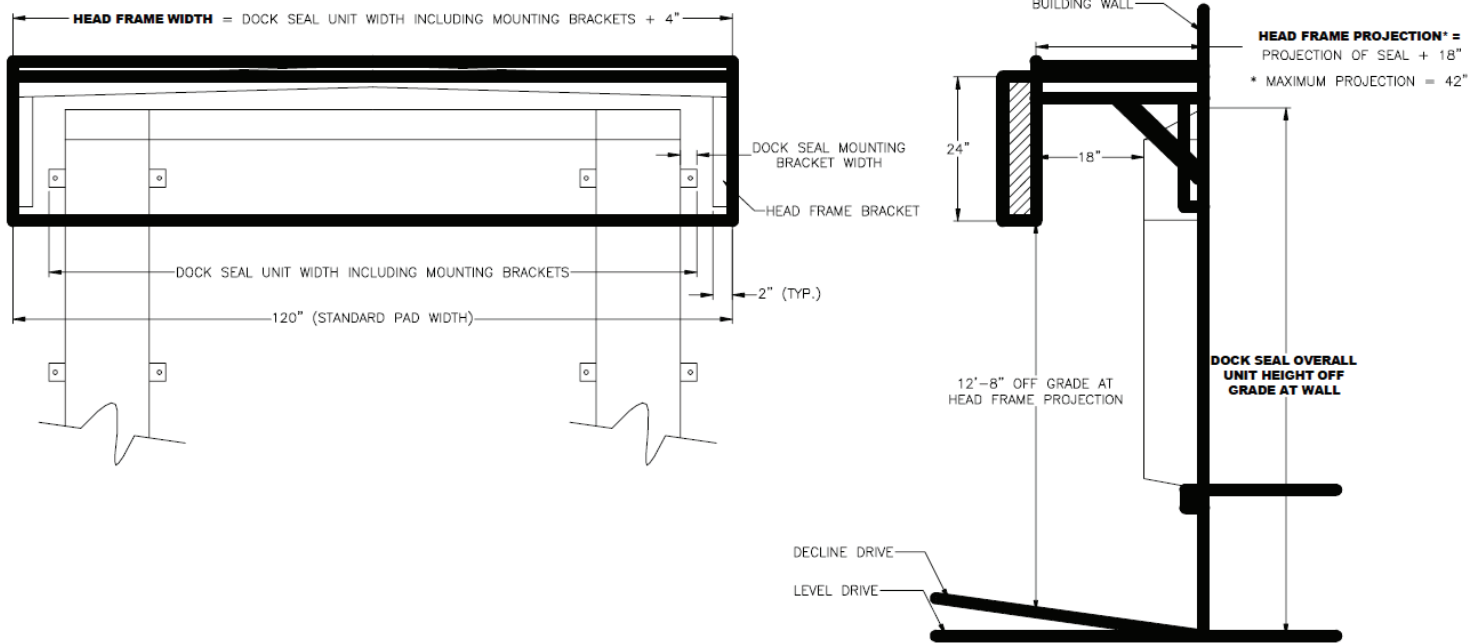

Drive/Approach: ☐ Level ☐ Incline ☐ Decline

Weighted Side Covers: 22 oz. vinyl

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Removable Cover Material: TS-55®

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

☐ Flame retardant fabric & foam ☐ Flame retardant fabric only

Wear Pleat Material: TS-55®

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Head Frame Material: Galvanized steel

Top Projection of Dock Seal: _____ **Bottom Projection of Dock Seal:** _____

Aquashield Head Frame Projection: _____ (18" greater than dock seal top projection)

Dock Seal Overall Unit Height off Grade at Wall: _____

Dock Seal Unit Width: _____ (Total inches)

Dock Seal Unit Width Including Mounting Brackets: _____

Aquashield Head Frame Width: _____ (Total inches)

Building Wall Construction: ☐ Metal ☐ Other

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



Kelley
1612 Hutton Drive, Suite 140
Carrollton, TX 75006
800.558.6960
www.kelleydocksystems.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Kelley as word and logo are registered trademarks belonging to ASSA ABLOY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLOY. All rights reserved. Part of ASSA ABLOY. Form # KPS-SARS-0725