



Foamside® Truck Shelter with Hinge Guard™

Product Specifications



DESIGN HIGHLIGHTS

- Impactable foam-filled side members
- Roll-formed galvanized steel framing
- Fiberglass stays in side/head curtains
- Translucent head member transmits light
- Raked header for moisture run-off
- Foam filled draft pads
- A range of colors and fabrics

HINGE GUARD™ DESIGN HIGHLIGHTS

- Effectively seals hinge gap at opened trailer doors
- Made of High Molecular Weight Polyethylene (HMWPE)
- Attached securely with industrial hook and loop for easy replacement

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Type of trailer: ☐ Standard ☐ Refrigerated

(*Not applicable for Hinge Guard™ - hydraulic tailgate, rear step section)

APPLICATION DATA

Door width: _____ ft. _____ in.

Door height: _____ ft. _____ in.

Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

QUANTITY _____


CERTIFIED FOR CONSTRUCTION

BY _____

COMPANY _____

ADDRESS _____

DATE _____

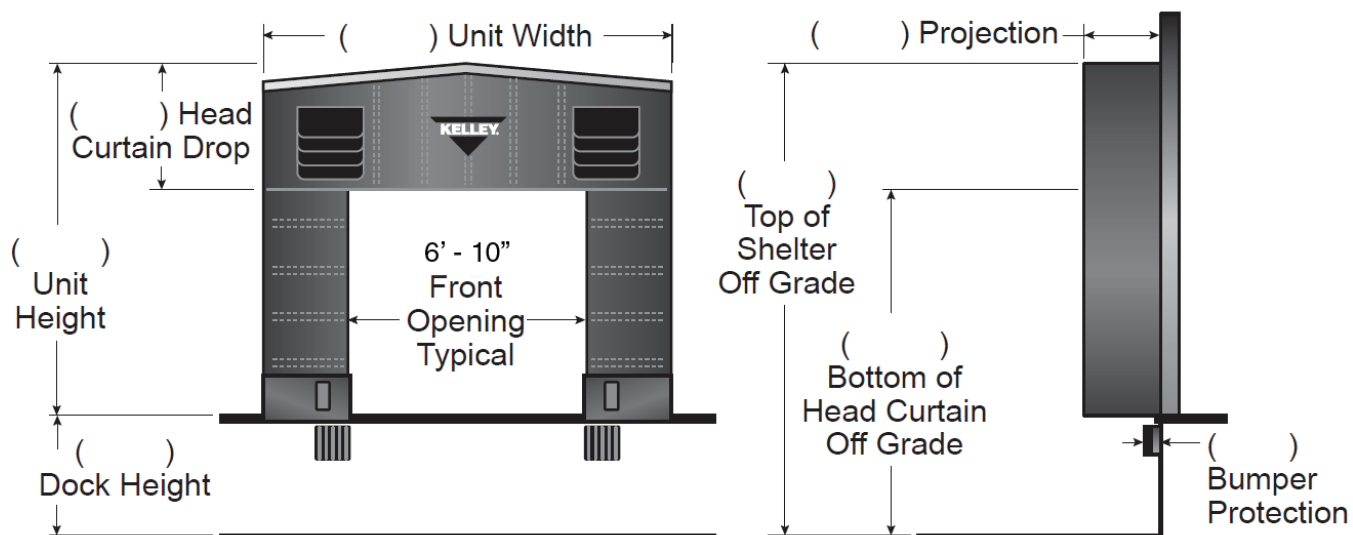

The FoamSide® Truck Shelter combines the flexibility of a seal and the full trailer access of a shelter. It creates a tight seal between the building wall and the back of the truck. **HINGE GUARD™** effectively prevents air infiltration into the warehouse through the trailer hinge gaps, saving energy and adding comfort for your employees.

Quantity _____

Drive/Approach: ☐ Level ☐ Incline ☐ Decline _____ % of grade

Please check box from each category:

Building Wall Structure: ☐ Metal ☐ Other

Unit Width: ☐ 11'-6" ☐ 11'-9" ☐ 11'-10" ☐ 12'-1"

Unit Height: ☐ 11'-0" ☐ 11'-6" ☐ 12'-0" ☐ 12'-6"

Head Member Style ☐ Raked ☐ Flat

Curtain Material: ☐ 22 oz. vinyl ☐ 40 oz. vinyl ☐ 40 oz. CSM ☐ TS-55

Color: ☐ Black ☐ Tan ☐ Brown ☐ Blue ☐ Green

Head Curtain Drop: ☐ 30" ☐ 36" ☐ 42" ☐ 48" ☐ 54" ☐ _____"

Taper: ☐ Yes ☐ No

Top Projection: ☐ 24" ☐ 26" ☐ 28" ☐ 30" ☐ 36" ☐ 42" ☐ _____"

Bottom Projection: ☐ 24" ☐ 26" ☐ 28" ☐ 30" ☐ 36" ☐ 42" ☐ _____"

Options: ☐ Door numbers ☐ Full length guide stripes

*Note: Consult factory for blackout application assistance.

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



Kelley
1612 Hutton Drive, Suite 140
Carrollton, TX 75006
800.558.6960
www.kelleydocksolutions.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Kelley as word and logo are registered trademarks belonging to ASSA ABLÖY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLÖY. All rights reserved. Part of ASSA ABLÖY. Printed in USA. KPS-SHFS_HG-1220