




Flood Package STAR® 4

Product Specifications

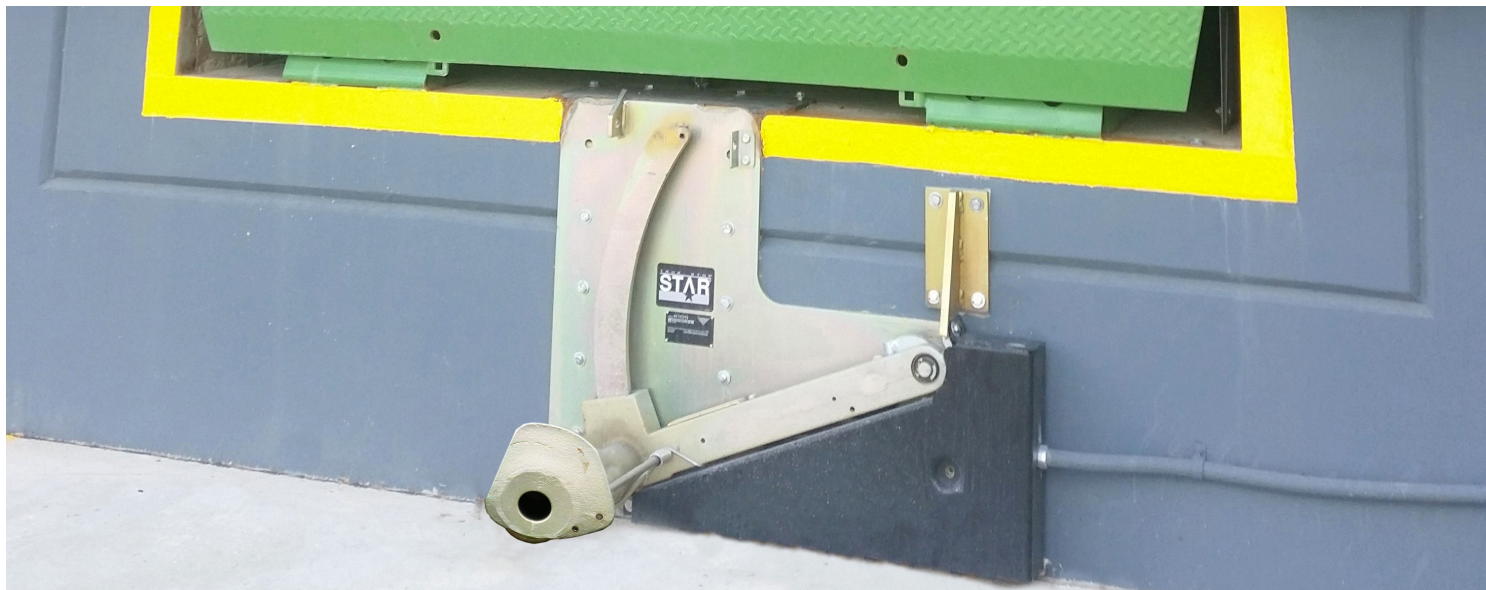

DESIGN HIGHLIGHTS

- Push-button control panel
- Flood sensor keeps the linear actuator from operating during a flood
- Non-impact design & operation
- Automatic interior/exterior 24V LED light communication system
- Solid-state controller
- Sensor bar indicates positive engagement with rear impact guard
- Audible alarm (if no contact with RIG)
- Low profile – stores at 9-1/2" off grade
- Horizontal hooking range 0 - 10" from face of 4" bumper
- Captures & complies with NHTSA regulation rear impact guards

AVAILABLE OPTIONS

- ☐ New construction mounting plate
- ☐ Leveler stored sensor for dock leveler interconnect
- ☐ Keyed override switch
- ☐ Heater kit
- ☐ Back plate cut-down _____
- ☐ Other _____

AVAILABLE ACCESSORIES

- ☐ Digital master or combination control panel with HMI _____
- ☐ Dock seal / shelter
- ☐ Loading dock light
- ☐ Guard rail / rack protection
- ☐ HV air exchange fan
- ☐ Other _____

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

MODEL _____ QUANTITY _____

VOLTAGE/PHASE _____

CERTIFIED FOR CONSTRUCTION


BY _____

COMPANY _____


ADDRESS _____

DATE _____


1. **General:** Flood Package STAR® 4 Vehicle Restraint is designed to engage the rear impact guard of a trailer or vehicle and secure it in place at the loading dock during loading and unloading operations. Linear actuator activation system, integral sensor bar on the locking unit to indicate contact with the rear impact guard, audible alarm if no contact is made with rear impact guard, control panel with printed operation instructions, exterior-mounted caution sign with forward facing and reversed lettering, and interior and exterior LED light communication system. Unit to provide 32,000 lbs. of restraining force.
2. **Construction:** Mounting frame consists of 3/8" thick heavy structural plate. High quality products are manufactured in a Certified Welding Fabricator (CWF) facility. A separate 1/4" thick steel horizontal mounting plate provides shear strength against pullout loads. Cast ductile iron restraining arm with 45,000 PSI yield strength includes a 3/8" steel rod sensor bar. Restraining arm moves over T-rail, which is welded to mounting plate with over 60" of continuous 3/16" bevel weld. Heavy-duty gas spring provides "float" to assure constant contact with rear impact guard. Flood Package STAR 4 comes standard with zinc-plated finish.
3. **Operation:** Once vehicle is backed into position and the brakes are set, the operator pushes the "HITCH" button to activate the restraining arm, which will move vertically along the reinforced T-rail until it contacts the vehicles rear impact guard. The exterior light changes from green "O" to red "X" when the restraint is activated. The interior light changes from red "X" to green "O" only after the sensor bar on the restraining arm makes contact with the rear impact guard. If the restraining arm does not contact the rear impact guard, the interior light changes to flashing red "X" and an audible alarm sounds. The operator must push the "OVERRIDE" button, which restores the restraint, and then secure the trailer using an alternative method. The exterior light switches to red "X", and the interior lights will flash red "X" and green "O" to indicate that the vehicle is secured by alternate means. When loading/unloading is complete, the operator pushes the "RELEASE" button on the control panel. The interior light immediately changes to red "X" when the "RELEASE" button is pressed. The exterior light changes to green "O" when the restraining arm has been lowered to its stored position.
4. **Hooking Range:** The restraint will engage a rear impact guard positioned up to 10" horizontally from the face of a 4" bumper, has a vertical hooking range of 11 1/2" x 28" and complies with NHTSA regulations for rear impact guards. Unit stores at 10" above grade to accommodate low trailers.
5. **Control Panel:** Solid state control panel (9" W x 20" H x 8" D) features a programmable logic controller (PLC) and "real time" diagnostic capability, industrial quality push-buttons, integral 24V LED red and green lights and printed operational instructions. UL listed.
6. **Exterior Lights:** Low profile flashing green and red 24V DC LED lights (6" W x 6" H x 4 1/4" D) indicate safe or unsafe conditions for vehicle movement. Caution sign (9" W x 24" H) with standard and reversed lettering provided.
7. **Electrical:** 110V AC, 1 3/4 Amp. All lights are 24V DC. Power to unit and electrical connections provided by others. All components are UL listed.
8. **Linear Actuator:** 24V 1000 lbs load. Double-acting cylinder with 4" stroke and 1" bore.
9. **Communications:** Communication system consists of printed operating instructions on the control panel, interior and exterior composite red/green LED lights, and an exterior-mounted caution sign for the vehicle driver.
10. **Installation:** STAR 4 vehicle restraint is anchored to the front wall of the loading dock using concrete anchors (provided). The horizontal mounting plate is anchored to the pit floor under the dockleveler and welded to the mounting frame of the vehicle restraint. Lights, signs and control panel to be installed in accordance with provided instructions. Complete operating and installation instructions are included in the installation and owner's manual.
11. **Limited Warranty:** Kelley warrants all components to be free from defects in material and workmanship, under normal use, for a one year base period from the date of shipment in accordance with Kelley's Standard Warranty Policy. The "Base Warranty Period" will begin on the completion of installation or the sixtieth (60th) day after shipment, whichever is earlier.

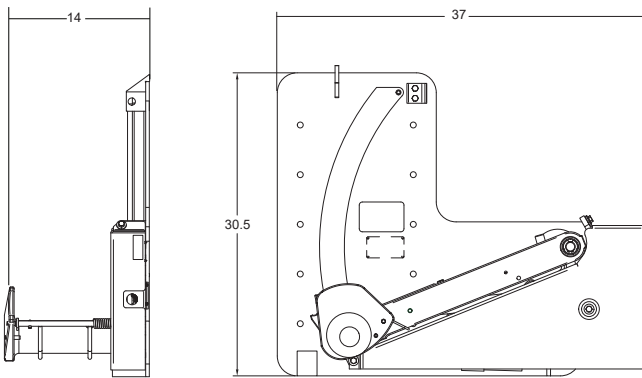

Exterior lights

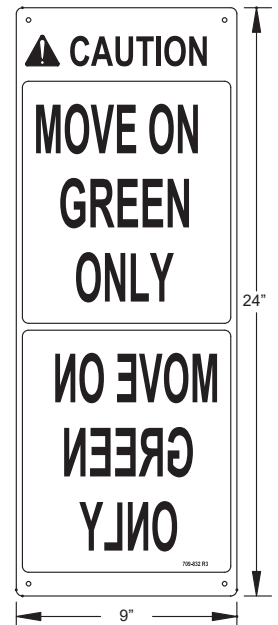

Control panel

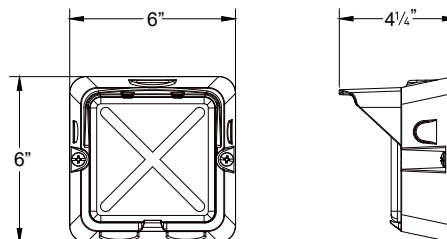

Kelley
1612 Hutton Drive, Suite 140
Carrollton, TX 75006
800.558.6960
www.kelleydockssolutions.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Kelley as word and logo are registered trademarks belonging to ASSA ABLÖY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.

©ASSA ABLÖY. All rights reserved. Part of ASSA ABLÖY. Printed in USA. Form # KPS-RVSTF-0725